

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 November 2000 (02.11.2000)


PCT

(10) International Publication Number
WO 00/65772 A3


- (51) International Patent Classification⁷: H04L 25/14, 1/00, 25/03, 7/02
- (21) International Application Number: PCT/US00/11123
- (22) International Filing Date: 24 April 2000 (24.04.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/130,616 22 April 1999 (22.04.1999) US
09/390,856 3 September 1999 (03.09.1999) US
09/437,721 9 November 1999 (09.11.1999) US
- (71) Applicant (for all designated States except US): **BROADCOM CORPORATION** [US/US]; 16215 Alton Parkway, Irvine, CA 92618 (US).
- (74) Agent: **HOANG, Phuong-Quan**; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **AGAZZI, Oscar E.** [AR/US]; 16215 Alton Parkway, Irvine, CA 92618 (US).
- (88) Date of publication of the international search report:
3 January 2002

[Continued on next page]

(54) Title: PHY CONTROL MODULE FOR A MULTI-PAIR GIGABIT TRANSCEIVER

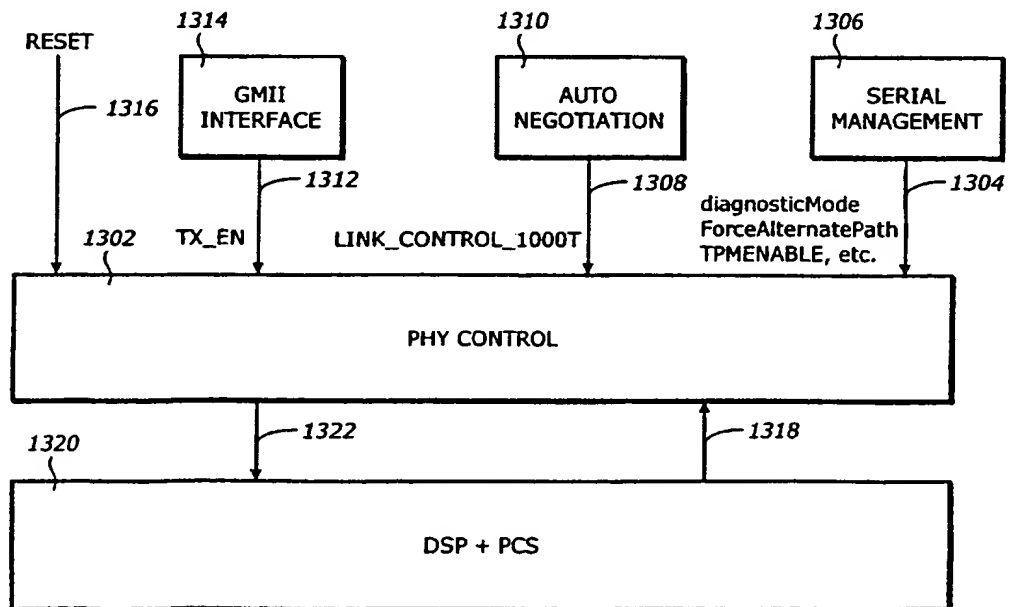

(57) Abstract: A method for controlling operation of a multi-pair gigabit transceiver. The multi-pair gigabit transceiver comprises a Physical Layer Control module (PHY Control), a Physical Coding Sublayer module (PCS) and a Digital Signal Processing module (DSP). The PHY Control receives user-defined inputs from the Serial Management module and status signals and diagnostics signals from the DSP and the PCS and generates control signals, responsive to the user-defined inputs, the status signals and diagnostics signals, to the DSP and the PCS.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

Internatio Application No
PCT/US 00/11123

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L25/14 H04L1/00 H04L25/03 H04L7/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 07077 A (STANFORD SYNCOM INC) 11 February 1999 (1999-02-11) page 17, paragraph 2 page 61, paragraph 1 -page 63, paragraph 3 page 67, paragraphs 2,3 page 104, paragraph 2 -page 109, paragraph 3 page 116, paragraph 3 -page 117, paragraph 2 figures 1I,3,1D,10C,34 ----	1-10,12, 13,15-22
X	WO 98 09400 A (OELCER SEDAT ;CHERUBINI GIOVANNI (CH); UNGERBOECK GOTTFRIED (CH);) 5 March 1998 (1998-03-05) abstract page 7, line 23 -page 8, line 8 page 14, line 8 - line 16 ----- -/--	9,10,12, 13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

18 August 2000

Date of mailing of the international search report

05/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Martínez Martínez, V

INTERNATIONAL SEARCH REPORT

Internatk	Application No
PCT/US 00/11123	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>AGAZZI O E ET AL: "TWO-PHASE DECIMATION AND JITTER COMPENSATION IN FULL-DUPLEX DATA TRANSCEIVERS"</p> <p>PROCEEDINGS OF THE INTERNATIONAL SYMPOSIUM ON CIRCUITS AND SYSTEMS. (ISCAS),US,NEW YORK, IEEE,</p> <p>vol. CONF. 25, 10 May 1992 (1992-05-10), pages 1717-1720, XP000338277</p> <p>ISBN: 0-7803-0593-0</p> <p>* I. Introduction *</p> <p>* II.Full-Duplex Transceiver Architecture.</p> <p style="text-align: center;">---</p>	9-14
A	<p>"Local and metropolitan area networks, Specific Requirements, Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications."</p> <p>1998 , LAN MAN STANDARDS COMMITTEE OF THE IEEE COMPUTER SOCIETY , USA XP002145257</p> <p>* 34.1 Overview *</p> <p>* 34.1.1 Reconciliation Sublayer (RS) and Gigabit Medium Independent Interface (GMII). *</p> <p>* Clauses 36.1 to 36.2.2 *</p> <p>* 36.2.5.2.7 Auto-Negotiaton Process *</p> <p>* 36.3.1. Service Interface of PMA sublayer. *</p> <p>* 36.3.7. Loopback mode *</p> <p>* 36.3.8. Test functions. *</p> <p style="text-align: center;">---</p>	1-3, 15-17
A	<p>HATAMIAN ET AL.: "Design Considerations for Gigabit Ethernet 1000Base-T Twisted Pair Transceivers."</p> <p>CUSTOM INTEGRATED CIRCUITS CONFERENCE, 1998.,</p> <p>11 - 14 May 1998, pages 335-342, XP002145256</p> <p>the whole document</p> <p style="text-align: center;">-----</p>	6-8, 20-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 00/11123

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9907077 A	11-02-1999	AU 8684098 A EP 1021884 A	22-02-1999 26-07-2000
W0 9809400 A	05-03-1998	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

THIS PAGE BLANK (USPTO)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

(43) International Publication Date
16 August 2001 (16.08.2001)

PCT

(10) International Publication Number
WO 01/60011 A2

(51) International Patent Classification⁷: H04L 29/00

(74) Agent: KURISKO, Mark, A.: Lucent Technologies Inc.,
P.O. Box 679, Holmdel, NJ 07733-3030 (US).

(21) International Application Number: PCT/US01/03864

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(22) International Filing Date: 6 February 2001 (06.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/181,037 8 February 2000 (08.02.2000) US

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: LUCENT TECHNOLOGIES INC.
[US/US]; 600 Mountain Avenue, Murray Hill, NJ
07974-0636 (US).


Published:

— without international search report and to be republished
upon receipt of that report

(72) Inventors: BULLMAN, William, R.; 3836 Post Drive,
Bethlehem, PA 18017 (US). HENRY, Matthew, R.;
8452 Oak Knoll Street, Fogelsville, PA 18051 (US).
HOLMQVIST, Ryan, S.; 4721 Harriet Lane, Bethlehem,
PA 18017 (US). STRAUSS, Steven, E.; 1714 Laurel Lane,
Orefield, PA 18069 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A TRANSLATION SYSTEM AND RELATED METHOD FOR USE WITH A COMMUNICATION DEVICE

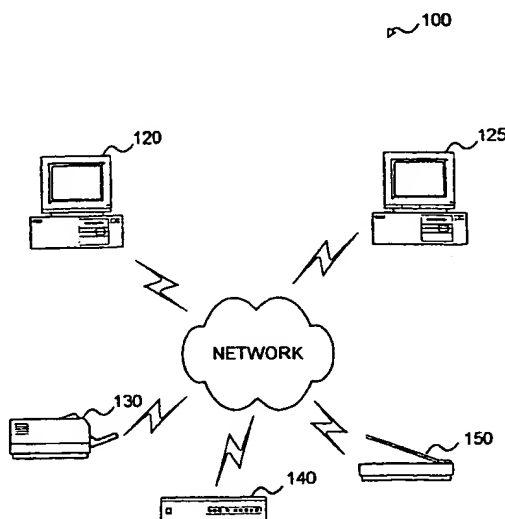

(57) Abstract: A translation system and related method for use with a communications device having a physical layer system and a data link layer system with a media access control layer subsystem and coupleable to a communications network. In one embodiment, the translation system includes a generator that constructs a piggyback packet containing characteristics associated with the physical layer system. The translation system also includes a correlator, coupled to the generator, that receives the piggyback packet and extracts information about the physical layer system. The generator and correlator transmit and receive the piggyback packet without substantially modifying the media access control layer subsystem.

**A TRANSLATION SYSTEM AND RELATED METHOD FOR USE WITH
A COMMUNICATION DEVICE**

CROSS-REFERENCE TO RELATED APPLICATION

5

The present application is a regular patent application based, and claiming priority, on a provisional patent application Serial No. 60,181,037, filed on February 8, 2000, entitled "Piggy Back Packets for Extra
10 Information," commonly assigned with the present application and incorporated herein by reference.

TECHNICAL FIELD OF THE INVENTION

15 The present invention is directed, in general, to computer networks and, more specifically, to a translation system for use with a communications network, a related method and a communications device employing the same.

20

BACKGROUND OF THE INVENTION

In today's world of rapidly changing quality of service ("QoS") and network standards, it is difficult to use existing hardware or software without making extensive,
25 and usually expensive, modifications to support new

-2-

standards that may be introduced. Such network standards as Microsoft® defined Network Driver Interface Standard ("NDIS"), Open Systems Interconnection ("OSI"), Institute of Electrical and Electronic Engineers ("IEEE") Standard(s)
5 802.x, Integrated Services Digital Network ("ISDN"), and others that are known in the art, have proven to be no exception.

Currently, for instance, no standard way exists for a physical layer system of these network systems to be
10 modified to pass necessary information associated with the physical layer (e.g., priority codes or encoding schemes associated with the physical layer system, interface characteristics, transmission line characteristics, and so on) up through various higher level hardware and software
15 components of an OSI/IEEE system stack to still higher layers of the OSI/IEEE system stack. This physical information would be advantageous, as an example, for certain network protocols.

Other network protocol systems that are "rate
20 adaptive" systems may employ QoS initiatives, such as those associated with the physical layer system. These QoS initiatives may include information concerning the interface characteristics of the physical layer system or the transmission characteristics associated with the
25 physical layer system or data packet. The specification protocols associated with the rate adaptive systems call not only for the employment of an IEEE 802.3 Media Access Control ("MAC") layer subsystem architecture, but also calls for an associated physical layer system architecture
30 employable to modulate and demodulate signals, for instance, on an "in-home" telephone line. In conjunction

-3-

therewith, the physical layer system of the rate adaptive network system should accommodate the defined signaling and QoS initiatives.

Standardizing the passing of information, such as QoS
5 signaling and other information, involves modifying, perhaps significantly, interposing layers of the system stack to allow the passing of the information from the physical layer system to, e.g., the data link layer system, the network layer system, or others. Modification of
10 various layers of network protocol stacks, however, may in turn create further problems or concerns.

To illustrate an example of the above problems or concerns, for a particular application, substantial time and effort has been invested to optimize various layers or
15 sub-layers of their system protocol stacks. For instance, the drivers associated with a MAC layer subsystem of the data link layer system are often designed for a particular application. Modification of the MAC layer subsystem may adversely effect other network programs and applications.
20 Therefore, it would be advantageous to be able to employ the current MAC layer subsystem driver despite variations in the physical layer system.

Accordingly, what is needed in the art is an improved system and method to pass information from the physical
25 layer system for use with the higher layers in a protocol stack associated with a communications device.

-4-

SUMMARY OF THE INVENTION

To address the above-discussed deficiencies of the prior art, the present invention provides, a translation
5 system and related method for use with a communications device having a physical layer system and a data link layer system with a Media Access Control ("MAC") layer subsystem and coupleable to a communications network. In one embodiment, the translation system includes a generator
10 that constructs a "piggyback" packet containing characteristics associated with the physical layer system. The translation system also includes a correlator, coupled to the generator, that receives the piggyback packet and extracts information associated with the physical layer
15 system. In a related embodiment, the correlator further receives the piggyback packet and extracts the information without substantially modifying the media access control layer subsystem. In yet another embodiment, the generator transmits the piggyback packet containing the information
20 without substantially modifying the media access control layer subsystem.

The present invention introduces, in one aspect, a translation system that allows the physical and data link layer systems to communicate without substantially
25 modifying the MAC layer subsystem. The piggyback packet is typically associated with, but not necessarily appended to, a data packet received by the physical layer system and contains characteristics associated with the physical layer system for judicious use by the data link layer system.
30 The characteristics associated with the physical layer system include any information about the physical layer

-5-

system itself (e.g., interface connectivity), transmission line characteristics of the communications network, and any communications device coupled thereto.

In one embodiment of the present invention, the
5 piggyback packet is associated with a data packet received by the physical layer system. In another embodiment, the piggyback packet may be transmitted by the generator to the correlator without being associated with a data packet. Additionally, the correlator may pass the information about
10 the physical layer system to a receiving subsystem embodied within the communications device.

The communications network, in one embodiment, may be a wireless communications network. Of course, however, other types of communications networks are within the broad
15 scope of the present invention.

In one embodiment of the present invention, the characteristics associated with the physical layer system are interface characteristics of the physical layer system. In another embodiment, the characteristics associated with
20 the physical layer system are transmission line characteristics of the communications network. Additionally, the generator may determine the characteristics associated with the physical layer system, store the characteristics in the piggyback packet, set a
25 flag in the piggyback packet and pass the piggyback packet to the data link layer system.

In one embodiment of the present invention, the generator of the translation system is embodied in the physical layer system and the correlator of the translation
30 system is embodied in the data link layer system. Additionally, at least a portion of the generator and the

-6-

correlator may be embodied in a sequence of operating instructions operable on a processor of the communications device. Of course, the generator and correlator of the present invention may be associated with other subsystems
5 of the communications device, or communications network, and may be embodied in software, dedicated or hardwired discrete or integrated circuitry, or combinations thereof.

The foregoing has outlined, rather broadly, preferred and alternative features of the present invention so that
10 those skilled in the art may better understand the detailed description of the invention that follows. Additional features of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they can
15 readily use the disclosed conception and specific embodiment as a basis for designing or modifying other structures for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart
20 from the spirit and scope of the invention in its broadest form.

- 7 -

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is now made to the following
5 descriptions taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates a system level diagram of an embodiment of a communications network that may be employed in accordance with the principles of the present invention;

10 FIGURE 2 illustrates an isometric view of an embodiment of a computer system operating as a communications device constructed according to the principles of the present invention;

FIGURE 3 illustrates a block diagram of an embodiment
15 of a translation system constructed according to the principles of the present invention;

FIGURE 4 illustrates an exemplary block diagram of a piggyback packet constructed in accordance with the principles of the present invention.

-8-

DETAILED DESCRIPTION

Referring initially to FIGURE 1, illustrated is a system level diagram of an embodiment of a communications network 100 that may be employed in accordance with the principles of the present invention. More specifically, the communications network 100 is coupleable to a first communications device 120 and a second communications device 125. The first and second communications devices 120, 125 may communicate over the network 100. Also associated with the network 100 are a network printer 130, a bridge 140 and a network scanner 150. The network printer 130, the bridge 140 and the network scanner 150 are capable of communicating over a network using at least a portion of a network protocol stack.

In the exemplary embodiment shown, the network 100 may be an IEEE 802.3 system architecture for a "rate adaptive" network system such as a Home Phoneline Networking Architecture ("HPNA"). The HPNA is a standard created by the Home Phoneline Networking Alliance and employs the packet structure of IEEE 802.3 system architecture with additional protocols for rate adaptive transmission. Background information concerning HPNA is more fully discussed in Connecting the Home with a Phone Line Network Chip Set, by Edward H. Frank and Jack Holloway, IEEE Micro, March-April (2000) and incorporated herein by reference.

The first communications device 120 and the second communications device 125 may be personal computers or computer peripherals. However, the present invention is not limited to the communications devices 120, 125, 130, 140, 150, being a computer or computer peripherals, and may

-9-

be any communications device that employs at least a portion of a protocol stack or stack-type system, such as routers, facsimile machines and wireless devices.

Also, note that the present invention may be used in
5 other communications environments including a wireless system environment employing wireless system protocols, such as but not limited to IEEE Ethernet 802.11, a Bluetooth architecture, or other wireless protocols or environments presently known or later developed. The
10 aforementioned and other standards described herein are incorporated herein by reference.

The first and second communications devices 120, 125 may also run (execute) certain application programs. For example, the application programs may include word
15 processors, database applications, network programs and other applications associated with a HPNA network. The applications may also be designed to function in and through an interface such as a Microsoft®-defined Network Driver Interface Standard ("NDIS"), which includes a NDIS
20 network architecture. In network systems, including a NDIS network architecture, the system topology is packet based. Those skilled in the art should understand, however, that other communications networks and architectures may be employed in accordance with the principles of the present
25 invention.

Turning now to FIGURE 2, illustrated is an isometric view of an embodiment of a computer system 200 operating as a communications device (e.g., the first or second communications devices 120, 125 of FIGURE 1) constructed
30 according to the principles of the present invention. The computer system 200 may be a conventional personal computer

-10-

("PC"), although other communication devices (e.g., a router, a bridge or a network printer) are well within the broad scope of the present invention.

The computer system 200 includes a monitor 210, a
5 chassis 220 and a keyboard 230. Alternatively, the monitor 210 and the keyboard 230 may be replaced by other conventional output and input devices, respectively. The chassis 220 includes both a floppy disk drive 240 and a hard disk drive 245. The floppy disk drive 240 is employed to
10 receive, read and write to external disks; the hard disk drive 245 is employed for fast access storage and retrieval. The floppy disk drive 240 may be replaced by or combined with other conventional structures to receive and transmit data and instructions, including without limita-
15 tion, tape and compact disc drives, telephony systems and devices (including videophone, paging, networking and facsimile technologies), and serial and parallel ports.

The chassis 220 is illustrated having a cut-away portion that includes a battery 250, a clock 260, a central
20 processing unit ("CPU") 270 and a memory storage device 280. The processing circuitry of the present invention may be embodied in the CPU 270 and the communications circuitry of the present invention may be embodied in the CPU 270 in combination with the memory storage device 280. Although
25 the computer system 200 is illustrated having a single CPU 270, hard disk drive 245 and memory storage device 280, the computer system 200 may be equipped with a plurality of CPUs and peripheral devices.

It should be noted that any conventional computer
30 system having at least one CPU and is capable of employing at least a portion of a protocol stack that is suitable to

-11-

function as a communications device may be replaced, or be used in conjunction with, the computer system 200, including without limitation, videophones, telephones, routers, bridges, network printers, and hand-held devices, laptop/notebook, mini computers, including RISC and parallel processing architectures, or a combination thereof. Conventional computer system architecture is more fully discussed in Computer Organization and Architecture, by William Stallings, MacMillan Publishing Co. (3rd ed. 1993) and incorporated herein by reference. In other embodiments, the present invention may be embodied within software, hardware, firmware or a combination thereof.

Turning now to FIGURE 3, illustrated is a block diagram of an embodiment of a translation system 300 constructed according to the principles of the present invention. In the illustrated embodiment, the translation system 300 is employed in a communications network with a network protocol that is compatible with a HPNA. Of course, however, the present invention is not limited to HPNA and the translation system 300 may employ other network protocols.

A HPNA may be used to convey and receive data packets between the communications devices. In one embodiment of the present invention, a physical layer system 330 of the communications device may receive a data packet. The data packet may have embedded within it a payload data packet representing data that a communications device may wish to communicate to another communications device, as well as information associated with transmitting the data packet between communications devices (for example, an IEEE 802.3 standard data packet).

-12-

When the receiving communications device receives the data packet, a packet control subsystem 334 extracts the transmission specific data from the data packet, verifies the integrity of the data packet and transmits the data
5 packet to a data link layer system 320. Associated with the packet control subsystem 334 is a generator 335. The generator 335 employs the data packet structure to construct a piggyback packet that contains characteristics associated with the physical layer system 330. Piggyback
10 packets are discussed in more detail in the discussion of FIGURE 4.

The generator 335, in one embodiment, may determine the characteristics associated with the physical layer system 330, store the characteristics in the piggyback
15 packet, set a flag in the piggyback packet and pass the piggyback packet through a MAC layer subsystem 328 to the data link layer 320. The exemplary characteristics associated with the physical layer system 330 include parameters such as Quality of Service ("QoS") including
20 signal to noise ratio, the modulation scheme employed by the communications network, packet priority, transmission and interface characteristics and so on. In an alternative embodiment, the generator 335 may measure or sample the characteristics associated with the physical layer system
25 330. In a related embodiment, the generator 335 may set a flag indicating that the generator 335 measured or sampled the characteristics. Of course, however, the generator 335 may set other flags or not set any flags in the piggyback packet depending upon the type of information to be passed
30 using the piggyback packet.

-13-

Although it is within the scope of the present invention to use IEEE 802.3 packet structure to communicate information concerning the overall data packet from the data link layer system 320 or the physical layer system 330 through the MAC layer subsystem 328, it is not preferable to append the characteristics associated with the physical layer system 330 to the data packet. For instance, if the characteristics were appended to the data packet, the overall packet structure could violate the maximum packet size limitation of the protocol standard, rendering associated validity checks, such as Cyclical Redundancy Checks ("CRCs"), of the physical layer system 330 invalid.

Instead, to help overcome these limitations, a "piggyback" packet is created by the generator 335, associated with the physical layer system 330 of the communications device, and may be employed to transfer characteristics associated with the physical layer system 330. The generator 335 may transmit the piggyback packet immediately following the associated data packet. In another embodiment, the generator 335 may construct a piggyback packet independent of a data packet based upon changing characteristics of the physical layer system 330. Thus, the present invention may advantageously provide proactive notification of the characteristic changes.

In one advantageous embodiment, the passing of the piggyback packet within the translation system 300 can occur without necessitating a substantial modification of the MAC layer subsystem 328. The piggyback packet passes through the MAC layer subsystem 328 of the data link layer system 320 without substantial modification thereto, advantageously analogous to the transmission of a data

-14-

packet. This may be advantageous in, among other things, that the user may have a high degree of confidence in the integrity of the MAC layer subsystem 328.

The piggyback packet is transmitted through the MAC
5 layer subsystem 328 and a driver 325 to a correlator 321 of the data link layer system 320. The correlator 321 includes an editing subsystem 323 and performs piggyback packet recognition and extracts information about the physical layer system 330. In a related embodiment, the
10 correlator 321 may pass the extracted information to a receiving subsystem 315 or to upper layers of the translation system's protocol stack. One skilled in the pertinent art is familiar with protocol stacks. Background information concerning networks and their associated
15 protocols is discussed in Data Network Design, by Darren L. Spohn, McGraw-Hill (1993) and is incorporated herein by reference.

The receiving subsystem 315 may be embodied in a network layer system 310 or a software program that may
20 communicate with the data link layer system 320 or the network layer system 310. In one embodiment, the receiving subsystem 315 may perform statistical analysis of the information, reporting functions or network management. In another embodiment, the receiving subsystem 315 may be
25 embodied with a separate application program that is capable of running (executing) on the communications device.

In the illustrated embodiment, the generator 335 is embodied in the physical layer system 330 and the
30 correlator 321 is embodied in the data link layer system 320. Additionally, at least a portion of the generator 335

-15-

and the correlator 321 may be embodied in a sequence of operating instructions operable on a processor of the communications device. Of course, the generator 335 and correlator 321 of the present invention may be associated
5 with other subsystems of the communications device, or communications network, and may be embodied in software, hardware, firmware or a combination thereof.

Turning now to FIGURE 4, illustrated is an exemplary block diagram of a piggyback packet constructed in
10 accordance with the principles of the present invention. The piggyback packet advantageously allows characteristics associated with the physical layer system to be passed up to the data link layer system without substantially modifying the MAC layer system. As illustrated, the
15 piggyback packet includes a portion of the IEEE 802.3 standard fields to allow the piggyback packet to pass through the MAC layer system and other layers of the protocol stack. For example, the standard fields include a Destination Address (DA), a Source Address (SA), an
20 Ethertype, a Pad field and a Frame Check Sequence (FCS). Table 4.1 describes the contents of the piggyback packet of FIGURE 4.

Table 4.1

Field	Length	Field Description
25 DA	6 octets	Destination Address
SA	6 octets	Source Address
Ethertype	2 octets	0x886c (HPNA Link Control Frame)
SSType	1 octet	0x05

-16-

5	SSLength	1 octet	Number of additional octets in the control header, starting with the SSVersion field and ending with the second(last) octet of the Next Ethertype field.
	SSVersion	1 octet	0x00
	Vendor OUI	3 octets	An IEEE assigned Organizationally Unique Identifier
	Control data	0-249 octets	Vendor specific control data
	Next Ethertype	2 octets	0x0000
	Pad	0-38 octets	Any value octet
	FCS	4 octets	

10

As illustrated in FIGURE 4 and Table 4.1, the present invention advantageously provides additional information, such as the characteristics associated with the physical layer system in the control data field of the piggyback packet. For instance, the control data field may contain a sequence of Octets that delineate the modulation technique employed by the physical layer system.

In one embodiment of the present invention, the piggyback packet may take the form of a receive packet information type or a receive asynchronous information type. The receive packet information type is generally constructed in accordance with the reception of a data packet. Table 4.2 describes the contents of the piggyback packet of the receive packet information type.

25

Table 4.2

Field	Length	Field Description
DA	6 octets	Destination Address (see AG_Opt)

-17-

5	SA	6 octets	Source Address of the previously received data packet
	Ethertype	2 octets	0x886c (HPNA Link Control Frame)
	SSType	1 octet	0x05
	SSLength	1 octet	Number of additional octets in the control header, starting with the SSVersion field and ending with the second(last) octet of the Next EtherType field.
	SSVersion	1 octet	Version Info
10	Vendor OUI	3 octets	Vendor X OUI, e.g. 0x00601d (MSB to LSB)
	AG_TYPE	1 octet	0x00 = RcvPktInfo
	AG_Ver	1 octet	0x00
	AG_Opt	1 octet	<ul style="list-style-type: none"> [0]=0; AG_Mod_Type contain valid data and the destination address = broadcast. This is used when the receipt of a packet causes AG_Mod_Type to change from its previously reported value. [0]=1; AG_Mod_Type does NOT contain valid data and the destination address must be the destination address of the previous data packet. This is used when the receipt of a packet does not cause AG_Mod_Type to change its previously reported value.
	AG_Pad	1 octet	Reserved (for alignment)
15	AG_MSE	4 octets	MSE (MSB to LSB)
	AG_PE	1 octet	Payload Encoding of the Bit Stream
	AG_Priority	1 octet	Phy Priority Class per packet
	AG_Mod_Type	1 octet	Signal Modulation Type
	Next EtherType	2 octets	0x0000

-18-

Pad	0-38 octets	Any value octet
FCS	4 octets	

As illustrated in FIGURE 4 and Table 4.2, the present invention advantageously provides additional information, such as the characteristics associated with the physical layer system in the packet type (AG_TYPE), the modulation type (AG_Mod_Type), the priority type (AG_Priority) and the mean squared error value (AG_MSE). The packet type indicates the type of piggyback packet. The modulation type indicates the modulation technique employed by the physical layer system, including a pulse code modulation, a pulse amplitude modulation, a delta modulation and a differential pulse code modulation. Of course, however, the present invention is not limited to the above modulation techniques.

The priority type specifies the priority status of the associated data packet. In another embodiment of the present invention, the priority type indicates that the piggyback packet is to be passed up the protocol stack. The mean squared error value indicates a mean squared error of a signal or a group of signals. Of course, however, other fields of the piggyback packet or additional fields may be used to relate other type of information.

In another embodiment of the present invention, the piggyback packet may take the form of a receive asynchronous information type. The receive asynchronous information type is generally constructed when the characteristics associated with the physical layer system change. Table 4.3 describes the contents of the piggyback packet of the receive asynchronous information type.

Table 4.3

	Field	Length	Field Description
	DA	6 octets	Destination Address (see AG_Opt)
	SA	6 octets	Source Address of the previously received data packet
5	Ethertype	2 octets	0x886c (HPNA Link Control Frame)
	SSType	1 octet	0x05
	SSLength	1 octet	Number of additional octets in the control header, starting with the SSVersion field and ending with the second(last) octet of the Next EtherType field.
	SSVersion	1 octet	Version Info
	Vendor OUI	3 octets	Vendor X OUI, e.g. 0x00601d (MSB to LSB)
10	AG_TYPE	1 octet	0x00 = RcvAsyncInfo
	AG_Ver	1 octet	0x00
	AG_Pad	8 octets	Reserved to maintain the same AG_Mod_Type alignment as RcvPktInfo
	AG_Mod_Type	1 octet	Signal Modulation Type
15	Next EtherType	2 octets	0x0000
	Pad	0-38 octets	Any value octet
	FCS	4 octets	

As illustrated in FIGURE 4 and Table 4.3, the present invention advantageously provides additional information, such as the characteristics associated with the physical layer system in the packet type (AG_TYPE) and the modulation type (AG_Mod_Type). As described above, the packet type indicates the type of piggyback packet. The modulation type indicates the modulation technique employed

-20-

by the physical layer system, including a pulse code modulation, a pulse amplitude modulation, a delta modulation and a differential pulse code modulation. In other embodiments, the present invention is not limited to
5 the modulation techniques described above and may use different or additional modulation techniques. Of course, however, other fields of the piggyback packet or additional fields may be used to relate other type of information.

Those skilled in the art understand that the
10 previously described embodiment of the packet transport system is submitted for illustrative purposes only and other embodiments are well within the broad scope of the present invention. Although the present invention has been described in detail, those skilled in the art should
15 understand that they can make various changes, substitutions and alterations herein without departing from the spirit and scope of the invention in its broadest form.

-21-

WHAT IS CLAIMED IS:

1. For use with a communications device having a physical layer system and a data link layer system with a
5 media access control layer subsystem and coupleable to a communications network, a translation system, comprising:

a generator configured to construct a piggyback packet containing characteristics associated with said physical layer system; and

10 a correlator, associated with said generator, configured to receive said piggyback packet and extract information about said physical layer system.

2. The translation system as recited in Claim 1
15 wherein said correlator further receives said piggyback packet and extracts said information without substantially modifying said media access control layer subsystem.

3. The translation system as recited in Claim 1
20 wherein said generator further constructs and transmits said piggyback packet without substantially modifying said media access control layer subsystem.

4. The translation system as recited in Claim 1
wherein said piggyback packet is associated with a data
25 packet received by said physical layer system.

5. The translation system as recited in Claim 1
wherein said communications network is a wireless communications network.

30

-22-

6. The translation system as recited in Claim 1 wherein said characteristics associated with said physical layer system are interface characteristics of said physical layer system.

5

7. The translation system as recited in Claim 1 wherein said characteristics associated with said physical layer system are transmission line characteristics of said communications network.

10

8. The translation system as recited in Claim 1 wherein said generator further determines said characteristics associated with said physical layer system, stores said characteristics in said piggyback packet, sets
15 a flag in said piggyback packet and passes said piggyback packet to said data link layer system.

9. The translation system as recited in Claim 1 wherein said generator is embodied in said physical layer
20 system.

10. The translation system as recited in Claim 1 wherein said correlator further passes said information about said physical layer system to a receiving subsystem
25 embodied within said communications device.

11. The translation system as recited in Claim 1 wherein said correlator is embodied in said data link layer system.

-23-

12. The translation system as recited in Claim 1 wherein at least a portion of said generator and said correlator are embodied in a sequence of operating instructions operable on a processor of said communications
5 device.

-24-

13. A method for use with a communications device having a physical layer system and a data link layer system with a media access control layer subsystem and coupleable to a communications network, comprising:

5 constructing a piggyback packet containing characteristics associated with said physical layer system; and

 receiving said piggyback packet and extracting information about said physical layer system.

10

14. The method as recited in Claim 13 wherein said receiving and said extracting are performed without substantially modifying said media access control layer subsystem.

15

15. The method as recited in Claim 13 wherein said constructing is performed without substantially modifying said media access control layer subsystem.

20

16. The method as recited in Claim 13 wherein said piggyback packet is associated with a data packet received by said physical layer system.

17. The method as recited in Claim 13 wherein said
25 communications network is a wireless communications network.

18. The method as recited in Claim 13 wherein said
30 characteristics associated with said physical layer system are interface characteristics of said physical layer system.

-25-

19. The method as recited in Claim 13 wherein said characteristics associated with said physical layer system are transmission line characteristics of said communications network.

5

20. The method as recited in Claim 13 wherein said constructing further comprises determining said characteristics associated with said physical layer system, storing said characteristics in said piggyback packet, 10 setting a flag in said piggyback packet and passing said piggyback packet to said data link layer system.

21. The method as recited in Claim 13 wherein said constructing is performed by said physical layer system.

15

22. The method as recited in Claim 13 wherein said receiving and said extracting information further comprises passing said information about said physical layer system to a receiving subsystem embodied within said 20 communications device.

23. The method as recited in Claim 13 wherein said receiving is performed by said data link layer system.

25 24. The method as recited in Claim 13 wherein said method is at least partially embodied in a sequence of operating instructions operable on a processor of said communications device.

-26-

25. A communications device coupleable to a communications network, comprising:

a physical layer system coupled to said communications network;

5 a data link layer system coupled to said physical layer system and having a media access control layer subsystem; and

a translator, including:

10 a generator that constructs a piggyback packet containing characteristics associated with said physical layer system, and

a correlator, associated with said generator, that receives said piggyback packet and extracts information about said physical layer system for use
15 by said data link layer system.

26. The communications device as recited in Claim 25 wherein said correlator further receives said piggyback packet and extracts said information without substantially
20 modifying said media access control layer subsystem.

27. The communications device as recited in Claim 25 wherein said generator further constructs and transmits said piggyback packet without substantially modifying said
25 media access control layer subsystem.

28. The communications device as recited in Claim 25 wherein said piggyback packet is associated with a data packet received by said physical layer system.
30

29. The communications device as recited in Claim 25 wherein said communications network is a wireless communications network.

-27-

30. The communications device as recited in Claim 25 wherein said characteristics associated with said physical layer system are interface characteristics of said physical layer system.

5

31 The communications device as recited in Claim 25 wherein said characteristics associated with said physical layer system are transmission line characteristics of said communications network.

10

32. The communications device as recited in Claim 25 wherein said generator further determines said characteristics associated with said physical layer system, stores said characteristics in said piggyback packet, sets
15 a flag in said piggyback packet and passes said piggyback packet to said data link layer system.

33. The communications device as recited in Claim 25 wherein said generator is embodied in said physical layer
20 system.

34. The translation system as recited in Claim 25 wherein said correlator further passes said information about said physical layer system to a receiving subsystem
25 embodied within said communications device.

35. The communications device as recited in Claim 25 wherein said correlator is embodied in said data link layer system.

-28-

36. The communications device as recited in Claim 25 wherein at least a portion of said generator and said correlator are embodied in a sequence of operating instructions operable on a processor of said communications
5 device.

-29-

37. A piggyback packet for use with a communication network having a physical layer system and a data link layer system associated with a protocol stack, comprising:

5 a packet type that indicates the type of said piggyback packet; and

a modulation type that indicates a type of modulation signal used in said physical layer system.

38. The piggyback packet as recited in Claim 37
10 wherein said packet type is selected from the group consisting of:

a receive packet information type, and
a receive asynchronous information type.

15 39. The piggyback packet as recited in Claim 38 wherein said piggyback packet further comprises a priority type and a mean squared error value when said packet type is said receive packet information type, said priority type indicates a priority of said piggyback packet and said mean
20 squared error value indicates a mean squared error of a signal or group of signals.

40. The piggyback packet as recited in Claim 39 wherein said priority flag further indicates that said
25 piggyback packet is to be passed up said protocol stack.

-30-

41. The piggyback packet as recited in Claim 39 wherein said modulation type is selected from the group consisting of:

- a pulse code modulation,
- 5 a pulse amplitude modulation,
- a delta modulation, and
- a differential pulse code modulation.

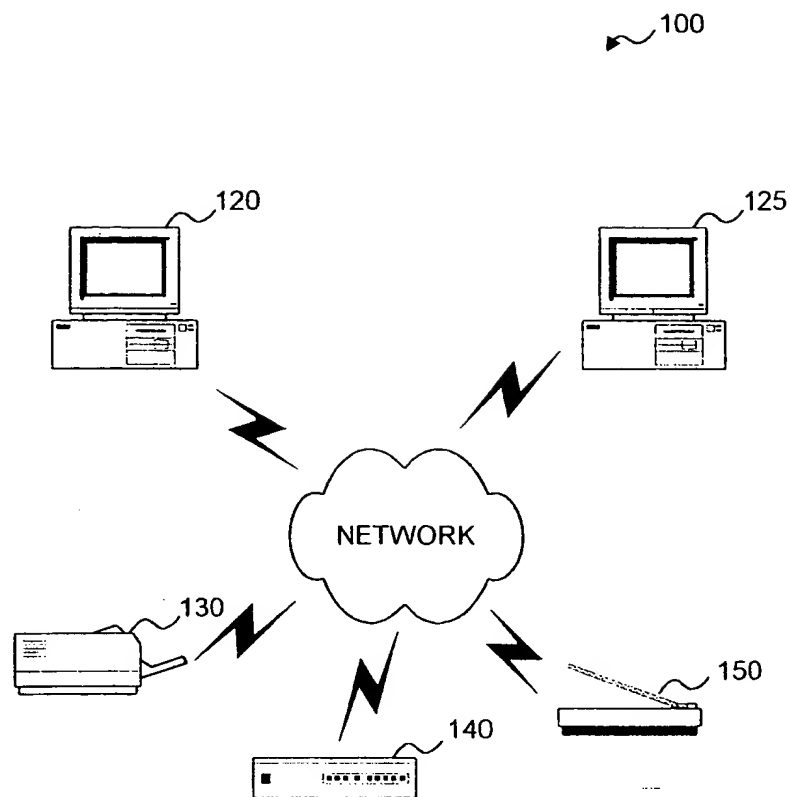
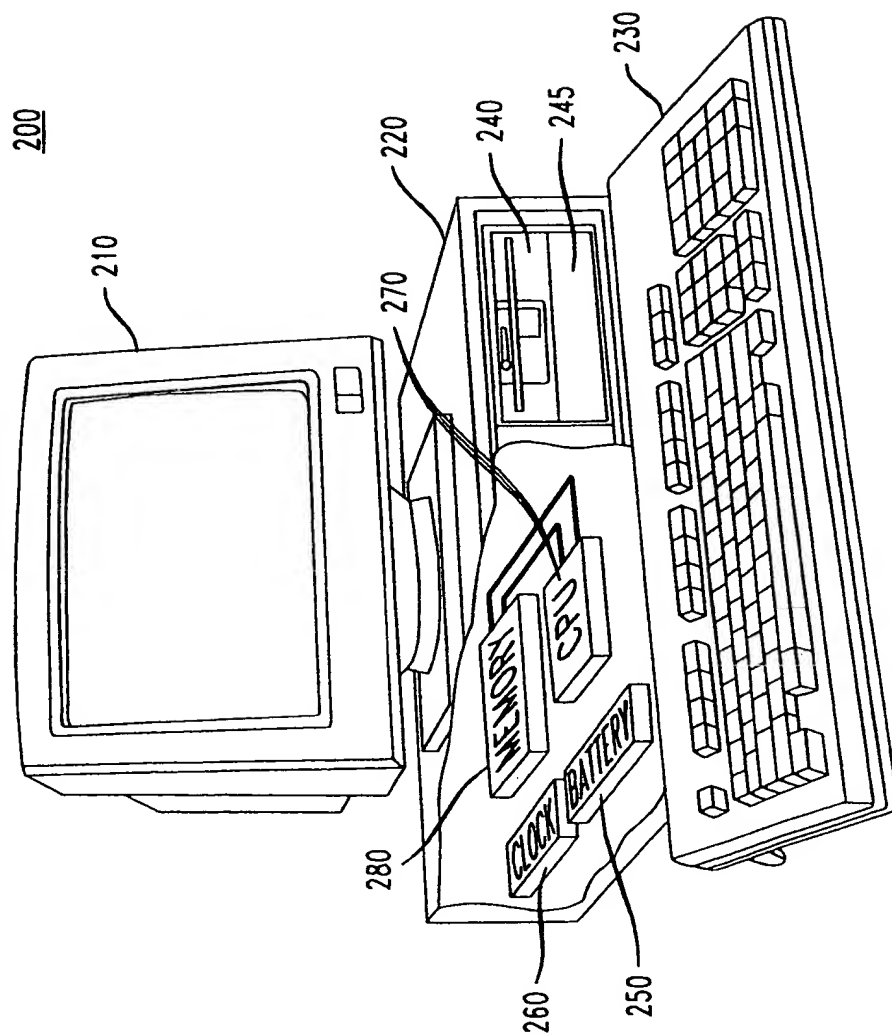


FIGURE 1

FIG. 2



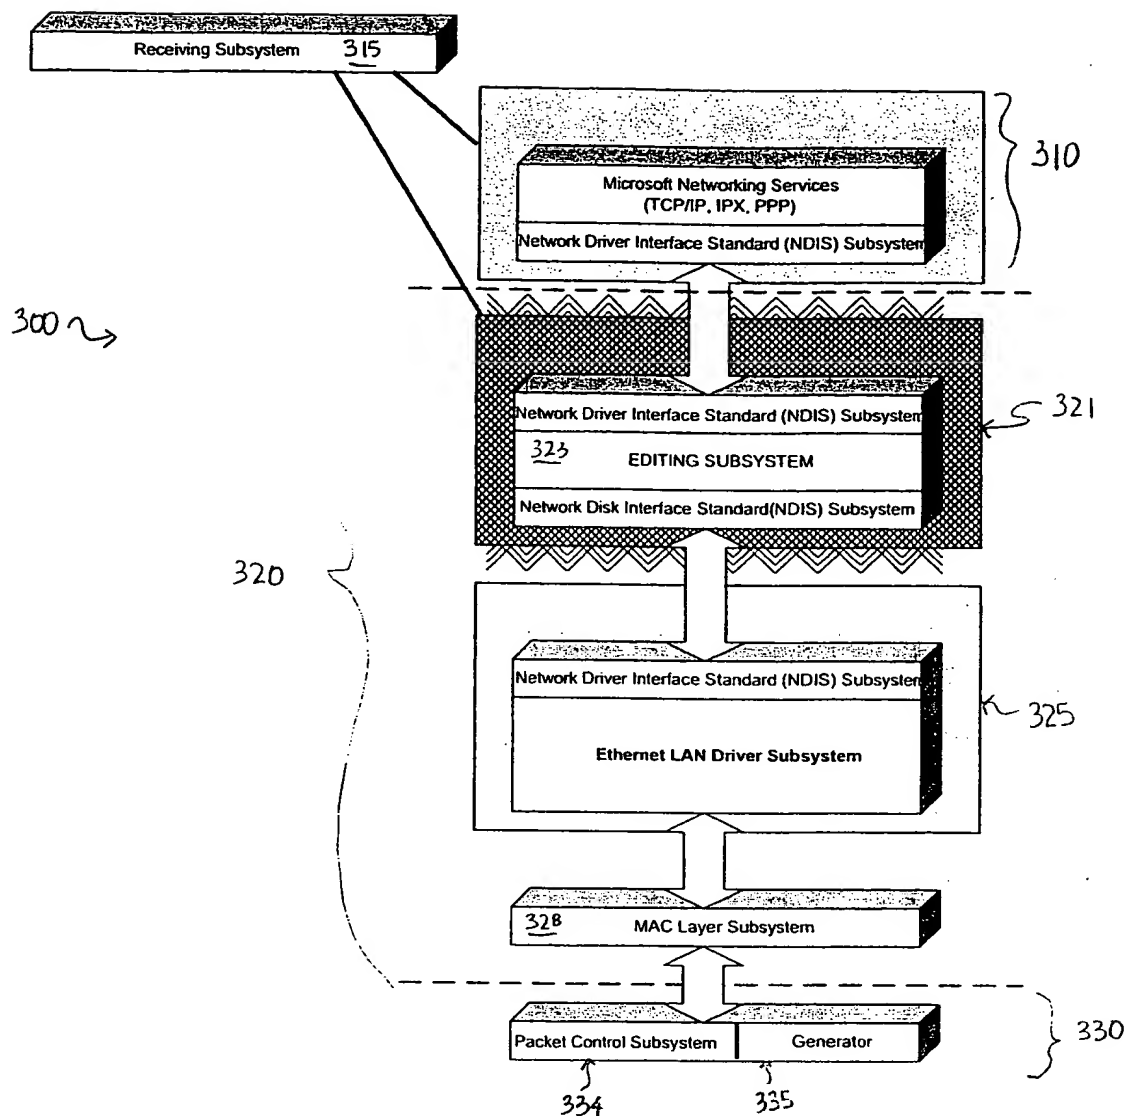


FIGURE 3

Octet Numbers	Field
0-5	DA
6-11	SA
12-13	EtherType
14	SSType
15	SSLength
16	SSVersion
17-19	Vendor OUI
20-268	Control Data (variable 0-249 Octets)
269 - 270	Next EtherType
271 - 308	Pad (variable 0-38 Octets)
309 - 312	FCS

FIGURE 4

THIS PAGE BLANK (USPTO)